


Tier1

BloombergNEF



Lloyd's Syndicate 1910



ISO14001

ISO9001

ISO45001




M6 HIEFF TWIN MONO


SPxxx-144M

- Bifacial (xxx=420~450W)
- Silver frame
- Black frame
- Full black

12Yr quality guarantee | 25Yr power warranty

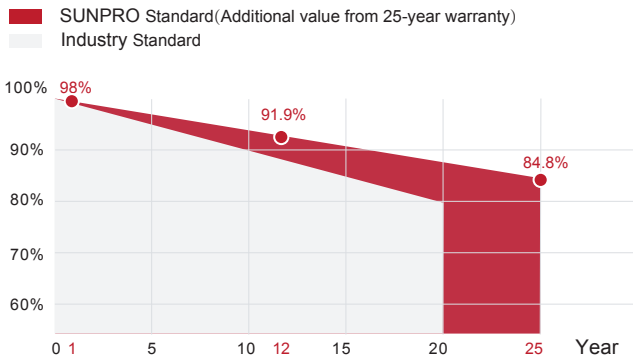

*SUNPRO Standard tiered warranty

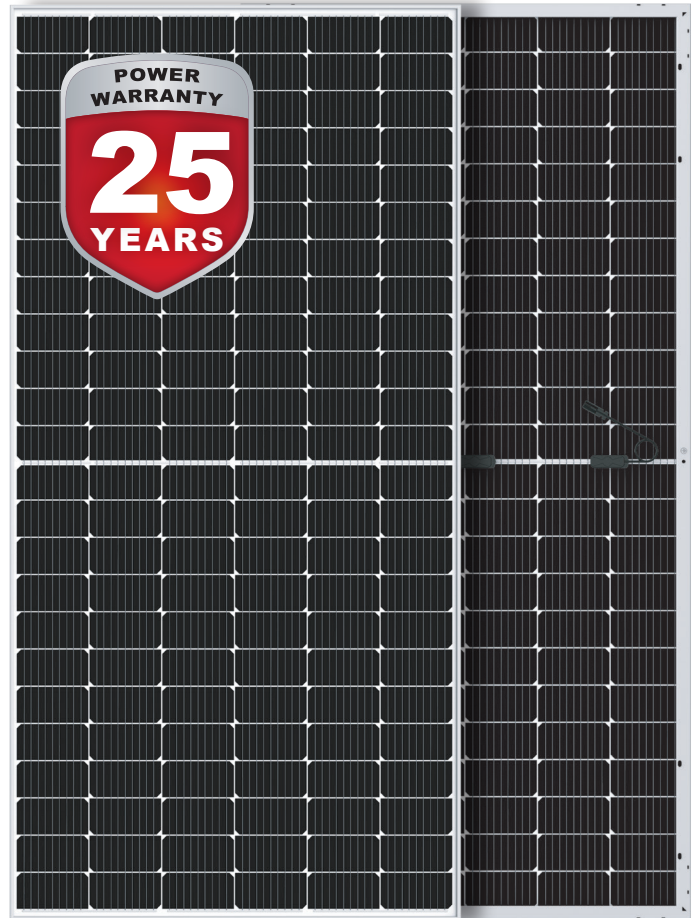

WARRANTY & GUARANTEE

Linear output power guarantee
12 years: 91.9% power output
25 years: 84.8% power output



WITHSTAND STRONG

Snow load 5400Pa
Wind load 2400Pa



TWO-SIDED BENEFITS

High efficiency solar cells.
Effective working area of both sides >75%, with significant power increase. Capture more sunlight and turn it into electricity



R&D AND PRODUCTION

Advanced production line. The leading solar cell cutting process and multi busbar design with SUNPRO Technology.



HIGH EFFICIENCY

Efficiency can reach 20.70%. Excellent low light performance. Higher power output under the conditions of haze, overcast, etc.

Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m², Cells Temperature 25°C)

Typical type	420W	425W	430W	435W	440W	445W	450W
Max power(Pmax)	420	425	430	435	440	445	450
Max power voltage(Vmp)	40.40	40.50	40.60	40.70	40.80	40.90	41.00
Max power current(Imp)	10.40	10.50	10.59	10.69	10.79	10.89	10.98
Open circuit voltage(Voc)	49.20	49.30	49.40	49.50	49.60	49.70	49.80
Short circuit current(Isc)	10.95	11.01	11.11	11.23	11.34	11.45	11.56
Module Efficiency(%)	19.32	19.55	19.78	20.01	20.24	20.47	20.70
Max system voltage	DC 1500V(TUV)						
Maximum Series Fuse Rating	20A						


Electrical parameters at NMOT test conditions (Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s)

Typical type	420W	425W	430W	435W	440W	445W	450W
Max power(Pmax)	341.8	346.0	349.8	353.9	358.0	362.2	366.0
Max power voltage(Vmp)	41.40	41.60	41.70	41.70	41.80	41.90	42.00
Max power current(Imp)	8.25	8.32	8.40	8.49	8.56	8.64	8.72
Open circuit voltage(Voc)	49.40	49.50	49.60	49.70	49.80	49.90	50.00
Short circuit current(Isc)	8.74	8.79	8.87	8.96	9.05	9.14	9.23


Electrical Characteristics with 15% Rear Side Power Gain

Front power Pmax/W	420W	425W	430W	435W	440W	445W	450W
Total power Pmax/W	483	488.75	494.5	500.25	506	511.75	517.5
Vmp/V(Total)	40.4	40.5	40.6	40.7	40.8	40.9	41
Imp/A(Total)	11.96	12.07	12.18	12.29	12.40	12.51	12.62
Voc/V(Total)	49.2	49.3	49.4	49.5	49.6	49.7	49.8
Isc/A(Total)	12.59	12.66	12.78	12.91	13.04	13.17	13.29

DIMENSIONS AND STRUCTURE

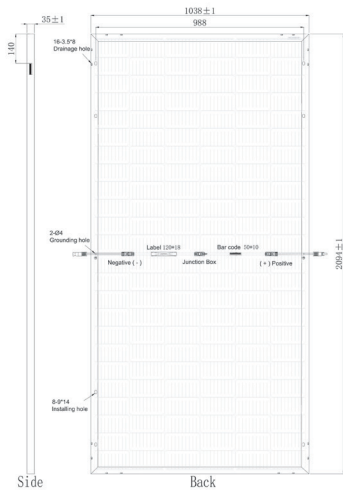

I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

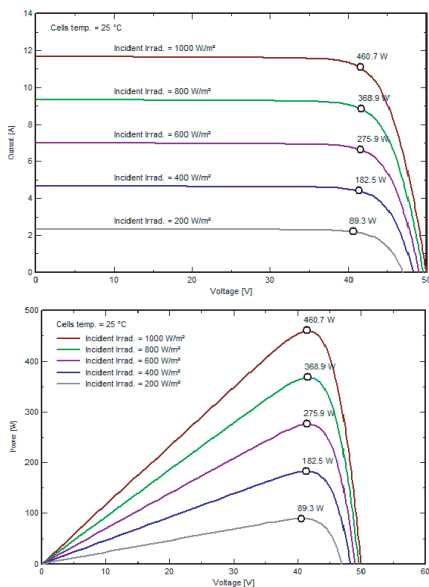

Mechanical Data

Dimensions	2094x1038x35mm
Weight	23.5kg
Glass	3.2mm tempered glass
Output cables	4mm ² , symmetrical lengths 1300mm
Connectors	MC4 compatible IP68
Cell type	Mono-Crystalline PERC, 9BB, 166x83mm
Number of cells	144cells (Half-Cell)

Temperature Characteristics

Temp.Coeff.of Isc(TK Isc)	0.050%/°C
Temp.Coeff.of Voc(TK Voc)	-0.29%/°C
Temp.Coeff.of Pmax(TK Pmax)	-0.34%/°C
Operating temperature	-40~+85°C
Normal operating cell temperature	44±2°C

Packing Configuration

Container	40'HQ
Pieces per pallet	66
Pallets per container	11
Pieces per container	726

Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730, IEC 61701, IEC 62716, PPP 58042
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TUV, CE, WEEE, INMETRO FIRE CERTIFICATE C1
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	0~+3%
Junction box	IP 68
Warranties	12 years product warranty and 25 years 84.8% of power