




The System modular devices make it possible to create infinite combination between devices and plates, thanks to a complete range that is able to satisfy all design, functional and installation requirements. The range includes commands, socket-outlets, protection, indicators, connectors and devices for the control, safety and comfort of your home.

| | | | |
|---|--------------------------------|--|---------------------------|
| Category | Socket-Outlet | Description | 2P+E - 16 A Dual amperage |
| Group | for dedicated lines | Colour | Green |
| Voltage | 250 V ac | Earth pit | - |
| Standard | English | Characteristics | With safety shields |
| For plug pins | Ø 4 / 5 mm | Wiring terminals | With screw |
| Type | P17-11 | Standard | CEI 23-50 |
| Resistance at test voltage | 2000 V at 50 Hz for 1 minute | Insulation resistance | > 5 MOhm |
| Prolonged operation switch (no.of position changes) | 10.000 at In 250 V ac cosφ=0,8 | Thermo-pressure with ball | 125 °C |
| Glow Wire Test | 850 °C | Terminal grip on cable traction | > 50 N |
| Terminal tightening capacity stranded cables (mm ²) | min. 0,75 - max. 2x4 | Terminal tightening capacity solid cables (mm ²) | min. 0,5 - max. 2x2,5 |
| No. SYSTEM modules | 1 | Material | Technopolymer |
| Electrocod | 0131 | | |

DIMENSIONAL

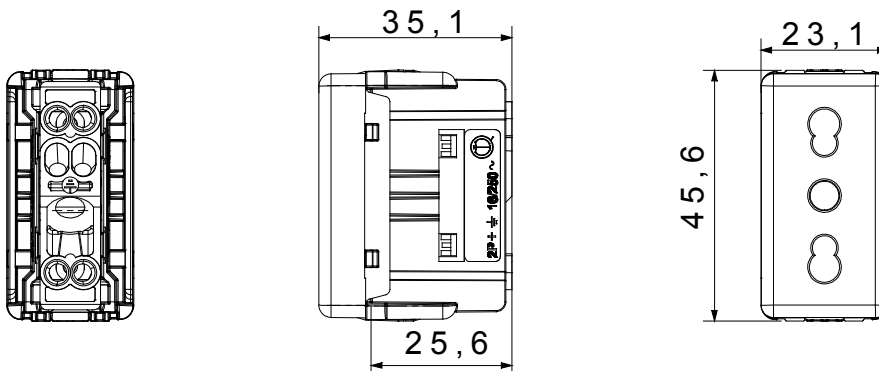

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

