


ST2236UX

Liquid Cooling Energy Storage System

Preliminary

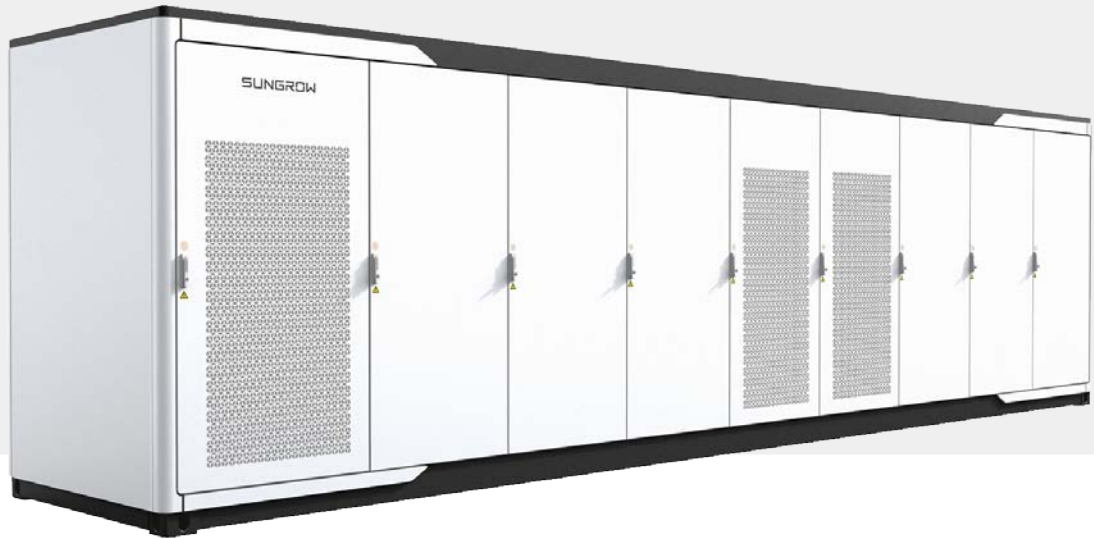

LOW COSTS

- Highly integrated ESS for easy transportation and O&M
- All pre-assembled, no battery module handling on site
- 8 hour installation to commission, drop on a pad and make electrical connections



SAFE AND RELIABLE

- DC electric circuit safety management includes fast breaking and anti-arc protection
- Multi level battery protection layers formed by discreet standalone systems offer impeccable safety



EFFICIENT AND FLEXIBLE

- Intelligent liquid cooling ensures higher efficiency and longer battery cycle life
- Modular design supports parallel connection and easy system expansion
- IP55 outdoor cabinet and optional C5 anti-corrosion



SMART AND ROBUST

- Fast state monitoring and faults record enables pre-alarm and faults location
- Integrated battery performance monitoring and logging

Type designation	ST2236UX
Battery Data	
Cell type	LFP
Battery capacity (BOL)	2236 kWh
System output voltage range	1150 – 1497 V
General Data	
Dimensions of battery unit (W * H * D)	9340*2520*1730 mm
Weight of battery unit	26,000 kg
Degree of protection	IP 55
Operating temperature range	-30 to 50 °C (> 45 °C derating)
Relative humidity	0 ~ 95 % (non-condensing)
Max. working altitude	3000m
Cooling concept of battery chamber	Liquid cooling
Fire safety standard/Optional	Deluge sprinkler heads (standard), Fused sprinkler heads (optional), NFPA69 explosion prevention and ventilation IDLH gases (optional)
Communication interfaces	RS485, Ethernet
Communication protocols	Modbus RTU, Modbus TCP
Compliance	CE, IEC 62477-1, IEC 61000-6-2, IEC61000-6-4, IEC62619
1 HOURS APPLICATION-ST2236UX*2-4000UD-MV	
BOL kWh (DC/AC LV Side)	4,472 kWh DC / 4,229 kWh AC
ST2236UX Quantity	2
PCS Model	SC4000UD-MV
Grid Connection Data	
Max.THD of current	< 3 % (at nominal power)
DC component	< 0.5 % (at nominal power)
Power factor	> 0.99 (at nominal power)
Adjustable power factor	1.0 leading – 1.0 lagging
Nominal grid frequency	50 / 60 Hz
Grid frequency range	45 – 55 Hz / 55 – 65 Hz
Transformer	
Transformer rated power	4,000 kVA
LV/MV voltage	0.8 kV / 33 kV
Transformer cooling type	ONAN (Oil Natural Air Natural)
Oil type	Mineral oil (PCB free) or degradable oil on request