

# Token 800

The seal of effective defence

PN: UPCSBSL5680TTOAZ01B  
EAN: 6422956011512

## Specifications

<b>Capacity</b>	800 VA / 480 W
<b>Type</b>	Line-Interactive
<b>Input</b>	
Nominal Voltage	230 VAC
Accepted Voltage Range	170 – 280 VAC
Frequency Range	50Hz / 60Hz (Auto Sensing)
<b>Output</b>	
Nominal Voltage	230 VAC
Accepted Voltage range	230 VAC, +/- 10%
Frequency Range (Batt. Mode)	50 Hz / 60Hz ± 1%
Power Factor	0.6 @ nominal voltage (100% load)
Waveform (Batt. Mode)	Simulated Sinewave
Transfer Time	6ms typical
<b>Indicators type</b>	
LCD	Standby mode, AC mode Overload mode, Battery mode Self-Test mode Battery replacement mode Fault Mode
Alarm	Battery mode, Overload mode, Low battery, Fault mode
<b>Protection</b>	
Outlets type	4x Schuko Battery Backup 4x Schuko Surge Protection RJ45 protection with 1Gb/s
Full protection	Overload, discharge, and overcharge protection
<b>Environement</b>	
Noise level	Fanless
Humidity	0-90 % (non-condensing)
Temperature	0-40°C



USB Charger



8 x Schuko



1Gb/s LAN protection

- LCD Display
- Compact size for stand and mounting flexibility
- Excellent microprocessor control guarantees high reliability
- Easy replacement battery compartment
- Provides battery backup and surge protected outputs
- Auto restart while AC is recovering
- Simulated sine wave
- Off-mode charging
- Cold start function
- Software management
- Boost and buck AVR for voltage stabilization

## Battery

Battery Type & Number	1x GP09122F (PN: BTVACIUOCTA2FCN01B)
Typical Recharge Time	6~8 hours recover to 90% capacity
Running time on battery (minutes)	25% Load - 15min 50% Load - 2min 30s 75% Load - 0min 48s

## Management


Communication port	HID USB
Software	<a href="https://www.power-software-download.com/viewpower.html">https://www.power-software-download.com/viewpower.html</a>
USB Charger	5V/2.1A

## Physical

Product dimensions	345 x 200 x 100 mm
Product weight	5.80 kg
Retail pack dimensions	425 x 269 x 146 mm
Retail pack Weight	6.2 kg



## Running time on battery

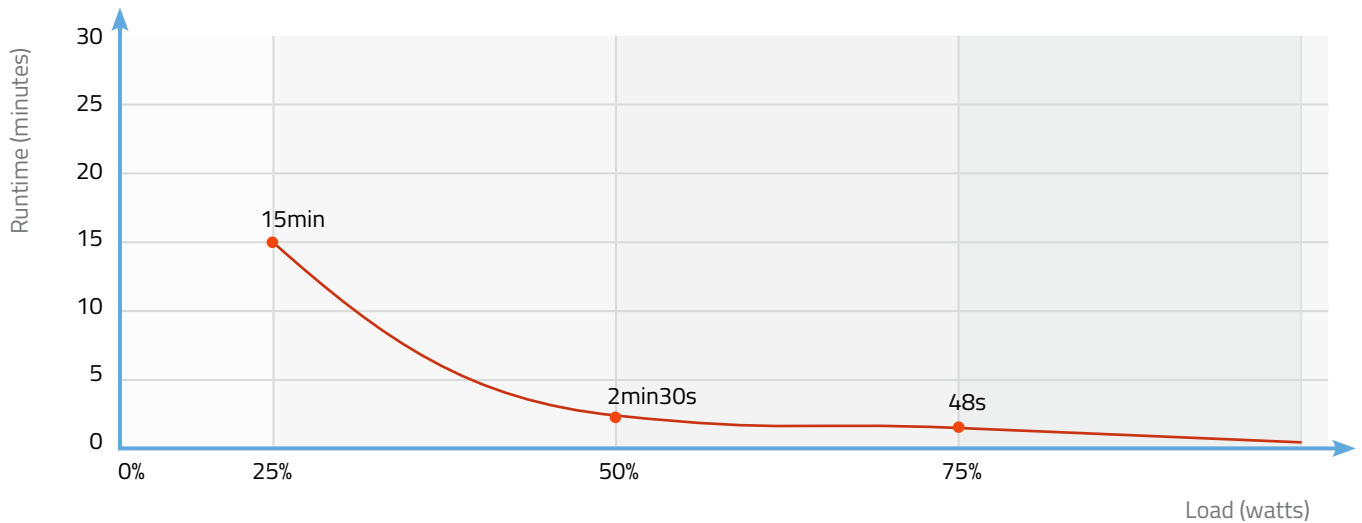

## Logistics

Carton Box Size (LxWxH)	461 x 438 x 287 mm
Pieces in the Carton Box	3
Net & Gross weight / CTN	NW: 17.4 kg / GW: 18.6 kg



## Certificates

RoHS 2011/65/EU CE

