

Deutsche
Qualität
Garantiert



144

HALF
CELLS

182
mm

CELL
SIZE



LID
RESISTANT



PID
RESISTANT



SALT CORROSION
RESISTANT




SAND
RESISTANT



AMMONIA
RESISTANT



HIGHLY STABLE
AND TOUGH

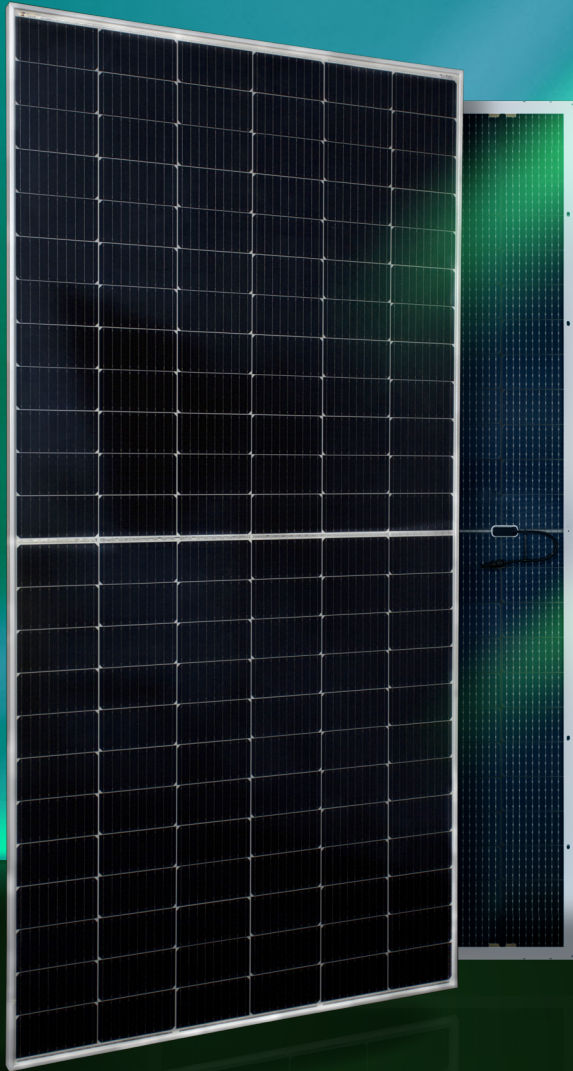

AURORA

HIGH ENERGY YIELD
RELIABILITY
DURABILITY

30

years

Performance
Guarantee

15

years

Product
Warranty

MONO-CRYSTALLINE PV MODULES
HALF-CUT CELLS • BIFACIAL • DOUBLE-GLASS


530W-550W

AE MD-144BD Series



IEC 61215
IEC 61730
Regular Production Surveillance
Type Tested and Monitored

IEC 62716 (Ammonia corrosion)
IEC 61701 (Salt mist corrosion)
IEC 60068 (Sand and dust)
IEC 62804 (PID resistance)



www.ae-solar.com

Mechanical and design specification





Cell type	Gallium-doped Mono c-Si PERC, Half-cut cells, 182 mm
No. of cells	144
Bifaciality	70±5%
Glass	2.0 mm, high transmission, AR coated, tempered
Encapsulation	POE
Back cover	2.0 mm, high transmission solar glass, tempered
Junction box	IP 68 rated
Frame	30 mm anodized Aluminium alloy
Cable	1 x 4 mm ² , 350 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	2278 mm x 1133 mm x 30 mm
Weight	32.5 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa/ 244 kg/ m ²
Mechanical load	5400 Pa/ 550 kg/ m ²

Packaging information

Packaging configuration	72 pcs / double pallets
Loading capacity	720 pcs / 40 HQ
Size / Pallet	2310 mm x 1140 mm x 2490 mm
Weight	2428 kg / double pallets

Temperature ratings

Operating temperature (°C)	-40 to +85
Temp.coefficient of P _{max} (%/°C)	-0.35
Temp.coefficient of V _{oc} (%/°C)	-0.275
Temp.coefficient of I _{sc} (%/°C)	0.045
Nom. operating temp. NOCT (°C)	45 ± 2

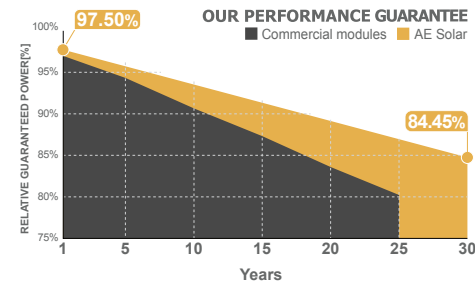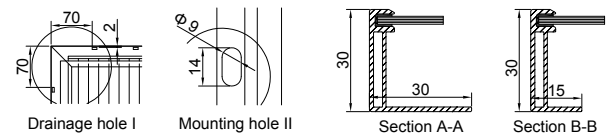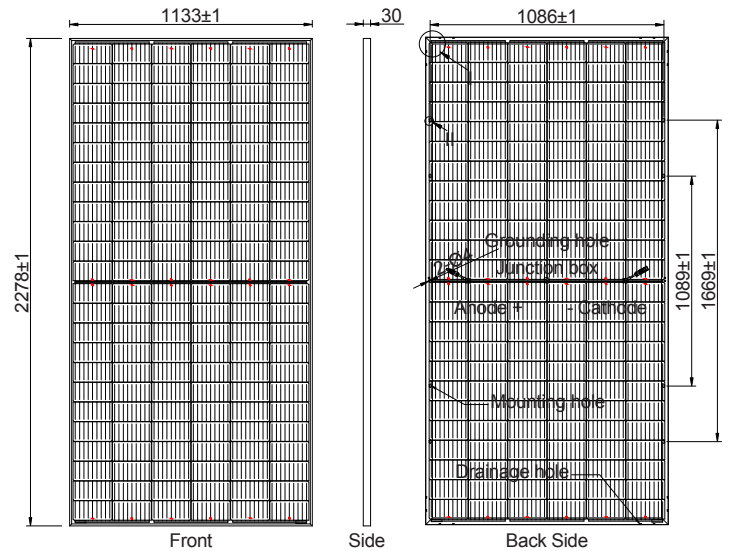

Electrical specifications (STC*): AE530MD-144BD AE535MD-144BD AE540MD-144BD AE545MD-144BD AE550MD-144BD

Parameter	AE530MD-144BD	AE535MD-144BD	AE540MD-144BD	AE545MD-144BD	AE550MD-144BD	
Nominal Max. Power	P _{max} (Wp)	530	535	540	545	550
Maximum operating voltage	V _{MPP} (V)	41.70	41.93	42.15	42.38	42.57
Maximum operating current	I _{MPP} (A)	12.71	12.76	12.81	12.86	12.92
Open-circuit voltage	V _{oc} (V)	49.65	49.78	49.90	50.01	51.44
Short-circuit current	I _{sc} (A)	13.47	13.52	13.57	13.62	13.67
Module efficiency	η (%)	20.53	20.73	20.92	21.12	21.31
Power tolerance	(W)	0~+5				
Maximum system Voltage	(V)	1500				
Maximum series fuse rating	(A)	25				

*STC: Standard test conditions (Irradiance 1000 W/m², Cell temperature 25°C and air mass of AM1.5)

Electrical specifications (NMOT*): AE530MD-144BD AE535MD-144BD AE540MD-144BD AE545MD-144BD AE550MD-144BD

Parameter	AE530MD-144BD	AE535MD-144BD	AE540MD-144BD	AE545MD-144BD	AE550MD-144BD	
Nominal Max. Power	P _{max} (Wp)	400	403	407	410	414
Maximum operating voltage	V _{MPP} (V)	39.30	39.50	39.70	39.90	40.10
Maximum operating current	I _{MPP} (A)	10.17	10.21	10.25	10.29	10.34
Open-circuit voltage	V _{oc} (V)	47.00	47.20	47.40	47.60	47.80
Short-circuit current	I _{sc} (A)	10.78	10.82	10.86	10.90	10.94

*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m², Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.

