

SG3400/3125/2500HV-MV-20

MV Turnkey Station for 1500 Vdc System - MV Separate Transformer + RMU



HIGH YIELD

- Advanced three-level technology, max. inverter efficiency 99 %

SAVED INVESTMENT

- Low transportation and installation cost due to 20-foot container design
- DC 1500 V system, low system cost
- Integrated MV transformer and switchgear
- Q at night function optional


EASY O&M

- Integrated current, voltage and MV parameters monitoring function for online analysis and fast trouble shooting
- Modular design, easy for maintenance
- Convenient external touch screen


GRID SUPPORT

- Compliance with standards: IEC 61727, IEC 62116
- Low/High voltage ride through (L/HVRT)
- Active & reactive power control and power ramp rate control

CIRCUIT DIAGRAM

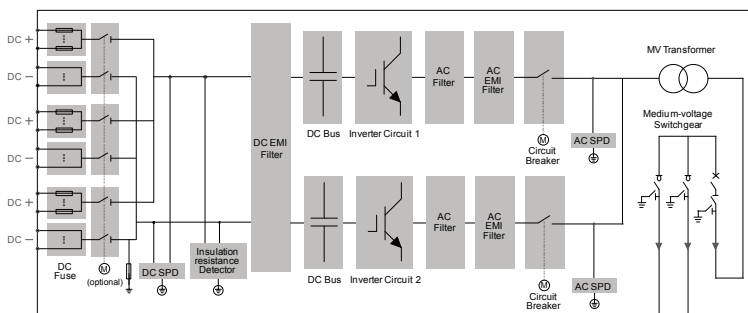

EFFICIENCY CURVE (SG3400HV-20)

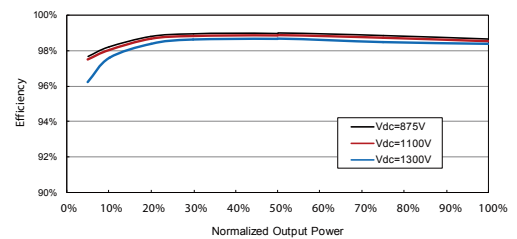

Type designation	SG3400HV-MV-20	SG3125HV-MV-20	SG2500HV-MV-20
Input (DC)			
Max. PV input voltage	1500 V		
Min. PV input voltage / Startup input voltage	875 V / 915 V	875 V / 915 V	800 V / 840 V
MPP voltage range for nominal power	875 – 1300 V	875 – 1300 V	800 – 1300 V
No. of independent MPP inputs	1		
No. of DC inputs	18 (optional: 22, 24 negative grounding or floating; 28 negative grounding)		18 – 24
Max. PV input current	4178 A	4178 A	3508 A
Max. DC short-circuit current	5000 A	5000 A	4800 A
Output (AC)			
AC output power	3593 kVA@ 25 °C / 3437 kVA@ 45 °C	3593 kVA@ 25 °C / 3437 kVA@ 45 °C / 3125 kVA@ 50 °C	2750 kVA@ 45 °C / 2500 kVA@ 50 °C
Max. AC output current	3458 A	3458 A	2886 A
AC voltage range	10 – 35 kV		
Nominal grid frequency / Grid frequency range	50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz		
THD	< 3 % (at nominal power)		
DC current injection	< 0.5 % I _n		
Power factor at nominal power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging		
Feed-in phases / Connection phases	3 / 3		
Efficiency			
Inverter Max. efficiency	99.0 %		
Inverter Euro. efficiency	98.7 %		
Transformer			
Transformer rated power	3437 kVA	3125 kVA	2500 kVA
Transformer max. power	3593 kVA	3593 kVA	2750 kVA
LV / MV voltage	0.6 kV / 10 – 35 kV	0.6 kV / 10 – 35 kV	0.55 kV / 10 – 35 kV
Transformer vector	Dy11		
Transformer cooling type	ONAN (Oil Natural Air Natural)		
Oil type	Mineral oil (PCB free) or degradable oil on request		
Protection and Function			
DC input protection	Load break switch + fuse		
Inverter output protection	Circuit breaker		
AC MV output protection	Circuit breaker		
Overvoltage protection	DC Type I + II / AC Type II		
Grid monitoring / Ground fault monitoring	Yes / Yes		
Insulation monitoring	Yes		
Overheat protection	Yes		
Q at night function	Optional		
General Data			
Dimensions (W*H*D)	6058 * 2896 * 2438 mm		
Weight	17T	17 T	18T
Degree of protection	IP54 (Inverter: IP55)	IP54 (Inverter: IP55)	IP54
Operating ambient temperature range	-35 to 60 °C (> 45 °C derating)	-35 to 60 °C (> 50 °C derating)	-35 to 60 °C (> 50 °C derating)
Allowable relative humidity range (non-condensing)	0 – 95 %		
Cooling method	Temperature controlled forced air cooling		
Max. operating altitude	1000 m (standard) / > 1000 m (optional)		
Display	Touch screen		
Communication	Standard: RS485, Ethernet; Optional: optical fiber		
Compliance	CE, IEC 62109, IEC 62116, IEC 61727		
Grid support	Q at night function (optional), L / HVRT, active & reactive power control and power ramp rate control		

