




The widest range of flush-mounting switchboards and distribution boards available on the market today. Seven families designed to offer solutions in the residential and advanced tertiary sectors, also available in Halogen Free material. Versions from 2 to 72 modules, degrees of protection from IP40 to IP55 and specific versions also for plasterboard. Furthermore, the offer includes Multimedia Enclosures in compact (36 modules) and complete (54 modules) versions, both compliant with what is suggested by the CEI 306-2 guide.

Clasa de izolație	II (conform standardelor IEC 61140)	Culoare	Ardezie lăcuită
Dim. exterioară LxHxD (mm)	328x338x108	Grad IP	IP40
Instalare	Carcase cu montare la nivel	Putere dispersabilă (W)	25
Rezistență mecanică	IK08	Tensiune nominală	400 V
Culoarea ușii	Ușă transparentă fumurie	Nr. de module EN 50022	24+2 (12x2)
Curent nominal	125 A	Test de încercare cu fir incandescent	650 °C
Pentru pereți	Zid	Temperatură de funcționare	-15 ÷ +60°C
Tip material	Fără halogeni în conformitate cu EN 60754-2	Termo-presiune cu bilă	70 °C
Standard	EN 60670-1 (cei 23-48) IEC60670-24 cei 23-49	Tensiune de izolație	750 V
Blocuri terminale max. instalabile	2 x 12 module		

### DIMENSIONAL

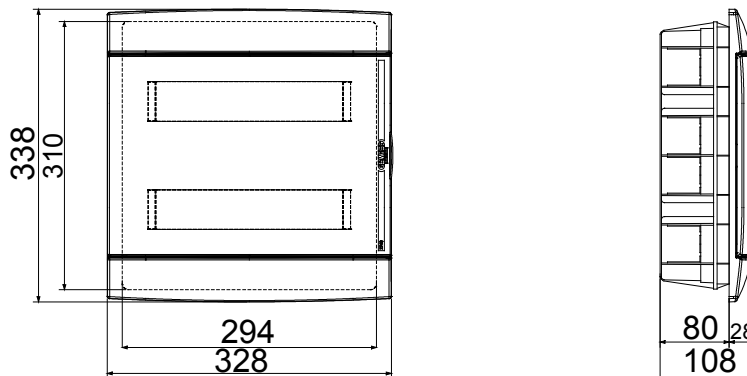

### TECHNICAL SYMBOLOGY




**IP**  
IP40

**IK**  
IK08

**GWT**  
650 °C

**HF**  
HALOGEN FREE  
Fără halogeni în conformitate cu EN 60754-2



### STANDARDS/APPROVALS

