


Energy Cable NA2XS(F)Y 1x800/35 CL-2 RM, Rated Voltage U₀/U: 18/30 kV

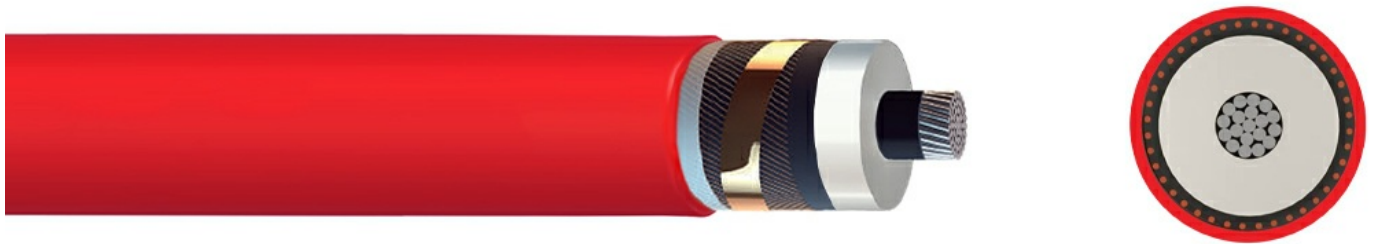

Description

Medium voltage cables are electrical cables designed to transmit electrical power at voltage levels ranging from 1kV up to 72kV. These cables are commonly used in industrial and commercial applications to connect power sources such as transformers, generators, and substations to loads such as motors, lighting systems, and other equipment. These cables consist of one or more conductors made of copper or aluminum, surrounded by layers of insulation and protective sheathing. The insulation material used can vary depending on the specific application and environmental factors such as temperature, moisture, and chemical exposure. Some common insulation materials include cross-linked polyethylene (XLPE), ethylene propylene rubber (EPR), etc.

Medium voltage cables can be designed for both underground and overhead installations, and may be armored or unarmored depending on the application requirements. Armored cables are typically used in applications where mechanical protection is required, while unarmored cables are used in less demanding applications.

Overall, medium voltage cables are critical components of modern electrical systems, providing a safe and reliable means of transmitting electrical power over long distances.

Standards

IEC 60502-2
 VDE 0276 / HD620
 IEC/EN 602228

Construction

Aluminum Conductor Compacted - Class 2
 Inner Semi Conductive Layer
 XLPE Insulation
 Outer Semi Conductive Layer
 Semi Conductive Tape
 Copper Wire and Tape Screen
 Water Blocking Tape
 PVC Sheath

Specificații

Tip cablu	Single Core
Diametrul total al cablului	67,70 mm
Greutate cablu	4678,00 kg/km
Material conductor	Aluminium
Secțiune transversală a conductorului	1x800/35 mm ²
Clasă conductor	CL-2
Tip conductor	RM
Material izolație	XLPE
Grosime izolație	8,0
Material manta	PVC
Tensiune nominală (U _o /U)	18/30 kV
Temperatura maximă admisibilă de funcționare	-20 >< +70 °C
Temperatura de lucru	-40 >< +90 °C
Temperatura de scurtcircuit	250 °C
Raza minimă de curbură (la instalare)	15xD
Raza minimă de curbură (în funcțiune)	13xD
Ambalare	Tambur de lemn, Tambur din placaj, Colac, Rolă
Lungimi livrate	To be confirmed by offer
Toleranță lungimi livrate	±5%