


Three Phase String Inverter

SUN-30/33/35/36K-G04



2 MPPT trackers, Max. efficiency up to 98.6%

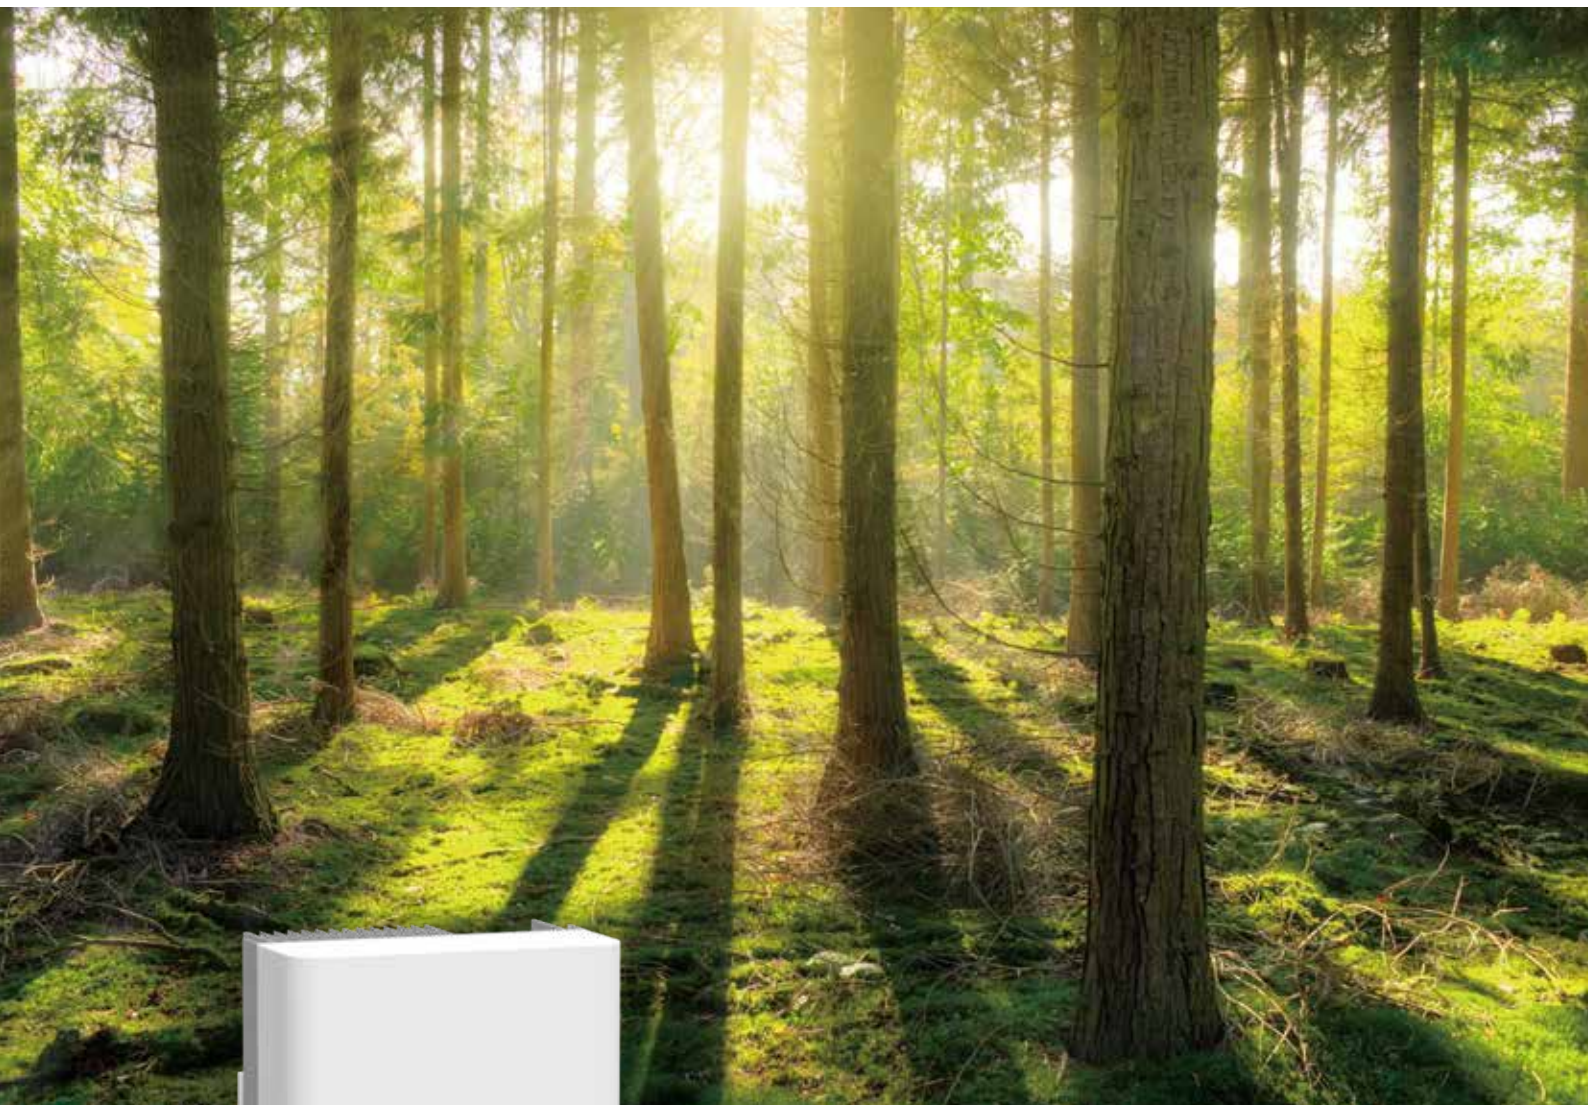

Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)

Deye

Stock Code: 605117.SH

Model	SUN-30K-G04	SUN-33K-G04	SUN-35K-G04	SUN-36K-G04
Input Side				
Max. DC Input Power (kW)	39	42.9	45.5	46.8
Max. DC Input Voltage (V)	1000			
Start-up DC Input Voltage (V)	250			
MPPT Operating Range (V)	200-850			
Max. DC Input Current (A)	40+40			
Max. Short Circuit Current (A)	60+60			
No.of MPP Trackers	2			
No.of Strings per MPP Tracker	3+3			
Output Side				
Rated Output Power (kW)	30	33	35	36
Max. Active Power (kW)	33	36.3	38.5	39.6
Nominal Output Voltage / Range (V)	3L/N/PE 220/380V, 230/400V			
Rated Grid Frequency (Hz)	50 / 60 (Optional)			
Operating Phase	Three Phase			
Rated AC Grid Output Current (A)	45.5/43.5	50/47.8	53/50.7	54.5/52.2
Max. AC Output Current (A)	50/47.9	55/52.6	58.3/55.8	60/57.4
Output Power Factor	0.8 leading to 0.8 lagging			
Grid Current THD	<3%			
DC Injection Current (mA)	<0.5%			
Grid Frequency Range	47-52 or 57-62 (Optional)			
Efficiency				
Max. Efficiency	98.6%			
Euro Efficiency	97.8%			
MPPT Efficiency	>99%			
Protection				
DC Reverse-Polarity Protection	Yes			
AC Short Circuit Protection	Yes			
AC Output Overcurrent Protection	Yes			
Output Overvoltage Protection	Yes			
Insulation Resistance Protection	Yes			
Ground Fault Monitoring	Yes			
Anti-islanding Protection	Yes			
Temperature Protection	Yes			
Integrated DC Switch	Yes			
Remote Software Upload	Yes			
Remote Change of Operating Parameters	Yes			
Surge Protection	DC Type II / AC Type II			
General Data				
Cabinet Size (WxHxD mm)	362×577×215 (Excluding Connectors and Brackets)			
Weight (kg)	23			
Topology	Transformerless			
Internal Consumption	<1W (Night)			
Running Temperature	-25-65°C, >45°C Derating			
Ingress Protection	IP65			
Noise Emission (Typical)	≤50 dB			
Cooling Concept	Smart Cooling			
Max. Operating Altitude Without Derating	2000m			
Warranty	5 Years			
Grid Connection Standard	VDE4105, IEC61727/62116, VDE0126, AS4777.2, CEI 0 21, EN50549-1, G98, G99, C10-11, UNE217002, NBR16149/NBR16150			
Operating Surroundings Humidity	0-100%			
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			
Features				
DC Connection	MC-4 Mateable			
AC Connection	IP65 Rated Plug			
Display	LCD1602			
Interface	RS485/RS232/Wifi/LAN			