




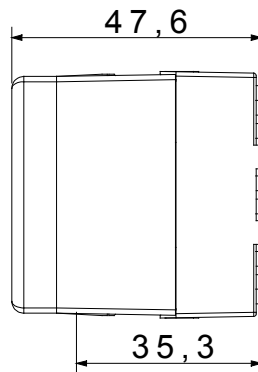

The System modular devices make it possible to create infinite combination between devices and plates, thanks to a complete range that is able to satisfy all design, functional and installation requirements. Colour and finiture: glossy white, bright and versatile
The range includes commands, socket- outlets, protection, indicators, connectors and devices for the control, safety and comfort of your home.

| | | | |
|--|---------------------------------|--|--------------------------------|
| Categorie | Releu | Contacte ieşire | 10 AX 250V c.a. |
| Descriere | Pas-pas 2P | Culoare | Alb |
| Nr. poli | 2 | Tensiune | 230 V |
| Standard | EN 60669-1 / EN 60669-2-2 | Frecvență | 50Hz |
| Rezistența la tensiunea de test | 2000 V la 50 Hz timp de 1 minut | Rezistența izolației | >5 MOhm |
| Borne de cablare | Conținut | Comutator de funcționare prelungit (nr. de modificări) | 10 poziții 250 V c.a. cosφ=0,6 |
| Termo-presiune cu bilă | 125 °C | Test de încercare cu fir incandescent | 850 °C |
| Prinderea bornei la tracțiunea cablului | > 50 N | Capacitate de strângere borne cabluri torsadate (mm ²) | 1x4 / 2x2,5 |
| Capacitate de strângere a bornelor cabluri solide (mm ²) | 2x2,5 | Nr. Module DE SISTEM | 1 |
| Putere nominală | 0 VA | Putere nominală (AC15) | 0 VA |
| Lămpi incandescente/cu halogen 230V | 800 W | Lămpi fluorescente cu balast electronic | 400 W |
| Lămpi fluorescente cu balast compensat | 360 W | Lămpi | 200 W |
| Lămpi cu LED-uri | 200 W | Lămpi cu halogen/LED cu transformator electronic | 200 W |
| Lămpi cu halogen/LED cu transformator electromecanic | 400 W | Material | Tehnopolimer |
| Electrocod | 140 | | |

DIMENSIONAL



TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

