

Echo Pro 1000

Innovation is soundly protected

PN: UPOL-OL100EP-CG01B
EAN: 6422956009465

Specifications

Capacity	1000 VA / 800 W
Type	On-line
Input	
Nominal Voltage	220-240 VAC
Accepted Voltage Range	80 - 300 VAC
Nominal frequency	50Hz / 60 Hz - user selectable
Frequency Range	40 ~ 70 Hz
Input surge protection	220 Joules
Power Factor	≥ 0.99 @ nominal voltage (100% load)
Output	
Nominal Voltage	208/220/230/240 VAC – user selectable
AC Voltage Regulation (Batt. Mode)	±1%
Frequency Range (Batt. Mode)	50 Hz / 60Hz ± 0.5 Hz
Current Crest Ratio	3:1
Harmonic Distortion	≤ 3 % THD (Linear Load) ≤ 5 % THD (Non-linear Load)
Waveform (Batt. Mode)	Pure Sinewave
Transfer time	Typical 0 ms Eco mode 4 ms
Outlets type	3 x Schuko Battery Backup & Surge Protection
Overload protection	
Line mode	105%-110%, warning only (No shutdown) 110%-120%, transfer to bypass after 60s >120%, Transfer to bypass immediately
Battery mode	105%-110%, warning only (No shutdown) 110%-120%, shutdown after 10s >120%, shutdown immediately
Bypass mode	110%-130%, warning only >130%, shutdown immediately



3 x Schuko outlets with protection



ECO Mode for Energy Saving



Pure sine wave output

- Online (double conversion)
- Pure sine wave output
- Wide Input Range (80V-300V)
- Up to 96% Efficiency Rates
- Software management
- HID USB, RS2322, SNMP port communication
- Generator Compatible
- Auto-restart
- Auto-charge
- Low noise level

Efficiency

To AC Mode	88%
To Battery Mode	85%
ECO Mode	96%
LCD Display	Load Capacity, Load & Battery level, AC mode, Battery mode, Fault indicators
Alarm	Load Capacity, Load & Battery level, AC mode, Battery mode, Fault indicators

Environment

Humidity	0-90 % (non-condensing)
Temperature	0-40°C
Noise level	Less than 40dB

Battery

Battery Type & Number	2 x GP07122L PN: BTVACFUOBTB2LBT01B
Typical Recharge Time	4 hours up to 90% capacity
Running time on battery (minutes)	25% Load - 19 min 50% Load - 6 min 75% Load - 2 min 100% Load - 1 min



Management


Connection ports	HID USB, RS232, EPO, SNMP
Software	http://www.powermonitor.software/#PowerGuideSoftware

Physical

Product dimensions	327 x 140 x 190 mm
Product weight	9.13 kg
Retail Pack Dimensions	440 x 217 x 277 mm
Retail Pack Weight	10.1 kg



Running time on battery

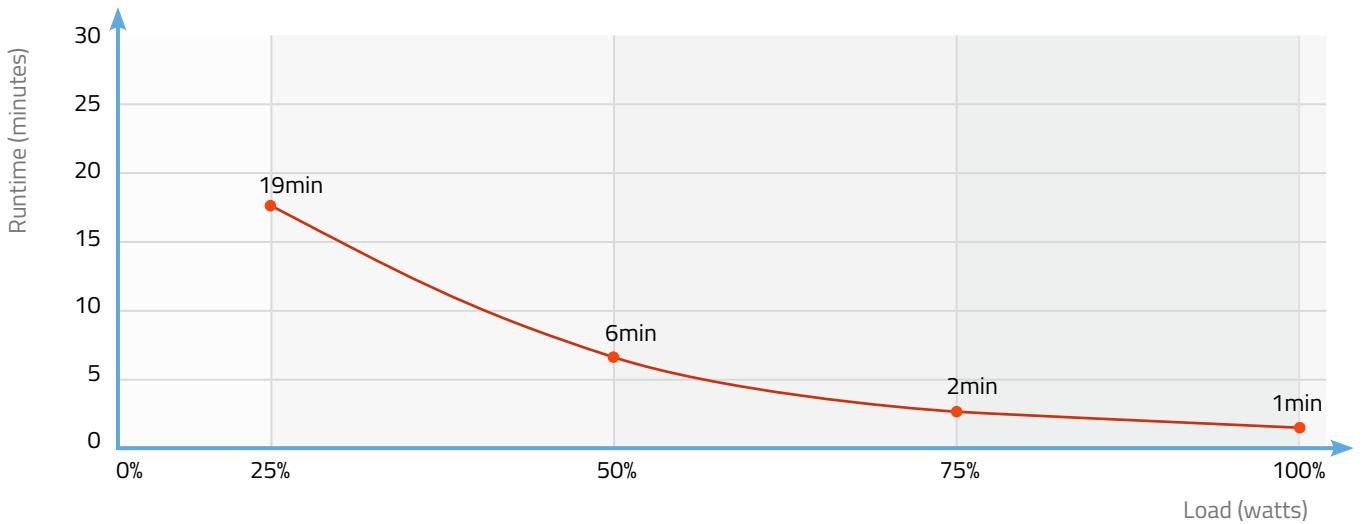

Logistics

Carton Box Size (LxWxH)	440 x 217 x 277 mm
Pieces in the Carton Box	1
Net & Gross weight / CTN	N.W.: 9.13 kg / G.W.: 10.1 kg



Certificates

